

Technical data



Diesel engine

		L 526	L 538	L 546
Diesel engine		4045CB551	4045CB551	6068HB551
Design		Water-cooled turbocharged in-series engine with cooled exhaust gas recirculation		
Cylinder inline		4	4	6
Fuel injection process		Electronic Common Rail high-pressure injection		
Output to	kW / HP	114 / 153	126 / 169	148 / 198
ISO 9249 ~ SAE J1349	at RPM	1,800	1,800	2,000
Rated output to				
ISO 14396/ECE-R.120	kW / HP	116 / 156	129 / 173	138 / 185
Nominal speed	at RPM	2,200	2,200	2,200
Max. torque to	lb ft	492	492	597
ISO 14396	at RPM	1,600	1,600	1,600
Displacement	in³	275	275	415
Displacement	litres	4.5	4.5	6.8
Bore / Stroke	in	4.17" / 5.0"	4.17" / 5.0"	4.17" / 5.0"
Tier 4f				
Harmful emissions values		In accordance with EPA 40 CFR part 1039 and CARB 13 CCR section 2423		
Emission control		SCR technology and closed diesel particle filter system		
Air cleaner system		Dry type filter with main and safety element, pre-cleaner, service indicator on the Liebherr display		
Electrical system				
Operating voltage	V	24	24	24
Battery	Ah	2 x 135	2 x 135	2 x 135
Alternator	V / A	24 / 100	24 / 100	24 / 100
Starter	V / HP	24 / 10.5	24 / 10.5	24 / 10.5



Driveline

Continuous hydrostatic driveline	
Design	Swash plate type variable flow pump and two variable axial piston motors in closed loop circuit and axle transfer case. Direction of travel is reversed by changing the flow-direction of the variable-displacement pump
Filtration	Suction return line filter for closed circuit
Control	By travel and inching pedal. The inching pedal makes it possible to control the tractive and thrust forces steplessly at full engine speed. The Liebherr control lever is used to control forward and reverse travel
Travel speed range	Speed range 1 _____ 0– 5.0 mph Speed range A1-2 _____ 0– 9.9 mph Speed range A1-3 _____ 0–24.9 mph* forward and reverse Speeds quoted apply with the tires indicated as standard on loader model.




* Configuration, tyres and mounting tools can influence the maximum speed.



Brakes

Wear-free service brake	Self-locking of the hydrostatic driveline (acting on all four wheels) and additional pump-accumulator brake system with wet multi-disc brakes located in the differential housing (two separate brake circuits)
Parking brake	Electro-hydraulically actuated spring-loaded disc brake system on the front axle

The braking system meets the requirements of the ISO 3450.

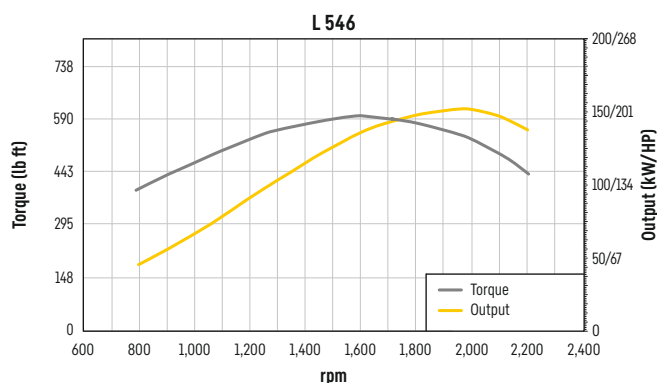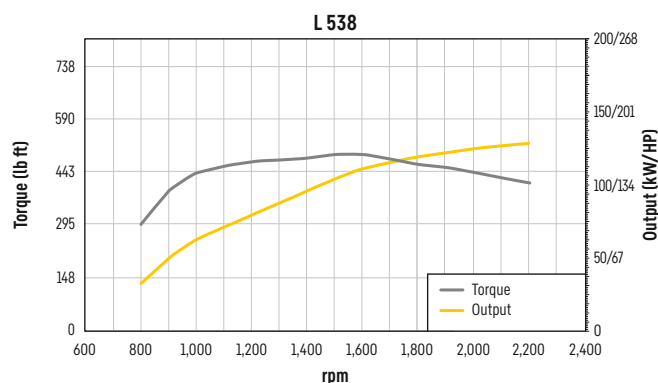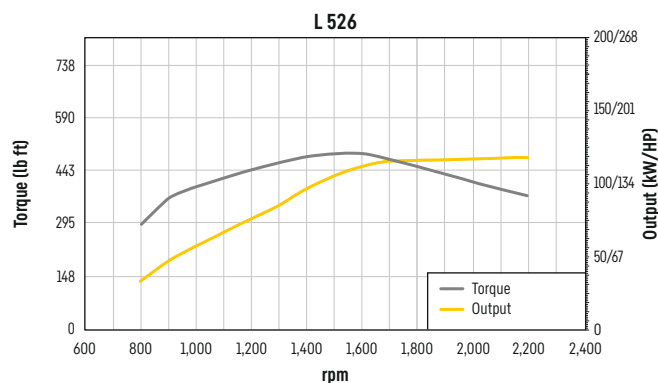

Axles

	L 526	L 538	L 546
Four-wheel drive			
Front axle	Fixed		
Rear axle	Centre pivot, with 10° oscillating angle to each side		
Height of obstacles which can be driven over	ft in	1'7"	1'7"
Differentials	Automatic limited-slip differentials with 45 % locking action in both axles		
Reduction gear	Planetary final drive in wheel hubs		
Track width	6'3" with all types of tires		

Steering

Design	"Load-sensing" swash plate type variable flow pump with pressure cut-off and flow control. Central pivot with two double-acting steering cylinders
Angle of articulation	40° to each side
Emergency steering	Electro-hydraulic emergency steering system

Attachment hydraulics

	L 526	L 538	L 546
Design	"Load-sensing" variable axial piston pump with output and flow control, and pressure cut-off in the control block		
Cooling	Hydraulic oil cooling using thermostatically controlled fan and oil cooler		
Filtration	Return line filter in the hydraulic reservoir		
Control	Liebherr control lever, electro-hydraulically operated		
Lifting function	Lifting, neutral, lowering Auto lifting and lowering using Liebherr control lever, float position using Liebherr control lever		
Tilt function	Tilt back, neutral, dump Automatic bucket return-to-dig for tilting in and out using Liebherr control lever		
Max. flow	gpm	45	53
Max. pressure	psi	5,076	5,076

Attachment

	L 526	L 538	L 546
Geometry	Powerful, optimised z-bar kinematics with one tilt cylinder, optional hydraulic quick coupler		
Bearings	Sealed		
Cycle time at nominal load	ZK	ZK	ZK
Lifting	s	5.0	5.5
Dumping	s	1.2	1.9
Lowering (empty)	s	3.9	4.9

Operator's cab

Design	Elastic mounted, noise-proof cab ROPS roll over protection per EN ISO 3471 / EN 474-1 FOPS falling objects protection per EN ISO 3449 / EN 474-1, Cat. II Driver's cab door with 105° opening angle and opening window with 5° gap opener or 170° opening, right side sliding side window, front windscreen made of laminated safety glass, green tinted as standard, side panels with single-pane safety glass ESG, green tinted, heated rear window ESG. Continuously adjustable steering column 6 way adjustable, vibration-damped operator's seat "Comfort" with seat, depth and incline adjustment as standard (air-cushioned with seat heating adjustable to operator's weight), Liebherr control lever mounted into the operator's seat as standard
Liebherr operator's seat	
Cab heating and ventilation	2-level air control, cooling water heating, defroster and air conditioning via manual nozzle position or electronic valve control for head and front area, as well as as electronic fresh / recirculated air control, electrically heated rear window, filter system with pre-filter, fresh air filter and recirculated air filter, easily replaced, air condition / automatic air conditioning system with new improved cooling output optional
Vibration emissions	
Vibrations in the hand/arm	ft/s ² ≤ 8.2
Vibrations through the whole body	ft/s ² ≤ 1.6

Sound level

	L 526	L 538	L 546
Sound pressure level to ISO 6396			
L _{PA} (inside cab)	dB(A)	69	69
Sound power level to 2000/14/EG			
L _{WA} (surround noise)	dB(A)	102	104


Capacities

	L 526	L 538	L 546
Fuel tank (plastic design)	gal	54.2	54.2
Fuel tank (steel version, optional)	gal	54.2	54.2
DEF tank	gal	5.3	5.3
Engine oil (inclusive filter change)	gal	5.5	6.2
Transmission	gal	0.7	0.7
Coolant	gal	7	7
Front axle / wheel hubs	gal	4.2 / 0.7	5 / 0.92
Rear axle / wheel hubs	gal	4.2 / 0.7	5 / 0.92
Hydraulic tank	gal	25	25
Hydraulic system, total	gal	44.9	47.6

Dimensions

Loading bucket

L 526 – L 546

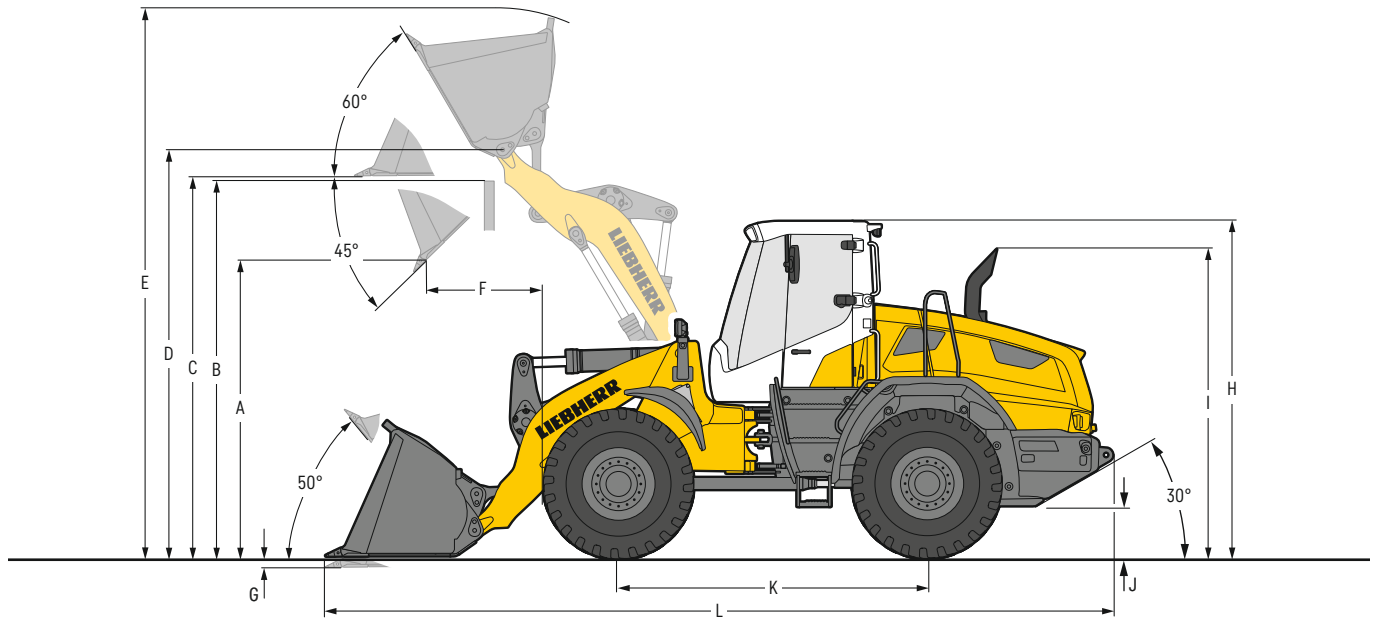

Loading bucket

		L 526			L 538			L 546		
		ZK	ZK-QC	ZK	ZK	ZK-QC	ZK	ZK	ZK-QC	ZK
Geometry		T	T	T	T	T	T	T	T	T
Cutting tools		T	T	T	T	T	T	T	T	T
Lift arm length	ft in	8'4"	8'4"	8'4"	8'8"	8'8"	8'8"	8'8"	8'8"	8'8"
Bucket capacity according to ISO 7546**	yd³	2.9	2.6	3.1	3.4	3.1	3.7	3.9	3.7	4.2
Specific material density	lb/yd³	3,034	3,034	2,697	3,034	3,034	2,697	3,034	3,034	2,697
Bucket width	ft in	8'3"	8'3"	8'3"	8'11"	8'3"	8'11"	8'11"	8'11"	8'11"
A Dumping height at max. lift height and 45° discharge	ft in	9'6"	9'3"	9'4"	9'9"	9'3"	9'8"	9'6"	9'2"	9'5"
B Dump-over height	ft in	11'4"	11'4"	11'4"	11'7"	11'7"	11'7"	11'7"	11'7"	11'7"
C Max. height of bucket bottom	ft in	11'10"	11'10"	11'10"	12'2"	12'2"	12'2"	12'2"	12'2"	12'2"
D Max. height of bucket pivot point	ft in	12'9"	12'9"	12'9"	13'1"	13'1"	13'1"	13'1"	13'1"	13'1"
E Max. operating height	ft in	16'9"	16'11"	16'12"	17'3"	17'8"	17'5"	17'7"	17'10"	17'9"
F Reach at max. lift height and 45° discharge	ft in	3'1"	3'4"	3'3"	3'7"	3'12"	3'8"	3'9"	4'1"	3'11"
G Digging depth	ft in	4"	4"	4"	4"	4"	4"	4"	4"	4"
H Height above operator's cab¹	ft in	10'8"	10'8"	10'8"	10'8"	10'8"	10'8"	10'8"	10'8"	10'8"
I Height above exhaust	ft in	9'8"	9'8"	9'8"	9'8"	9'8"	9'8"	9'8"	9'8"	9'8"
J Ground clearance	ft in	1'5"	1'5"	1'5"	1'5"	1'5"	1'5"	1'5"	1'5"	1'5"
K Wheelbase	ft in	9'9"	9'9"	9'9"	9'11"	9'11"	9'11"	9'11"	9'11"	9'11"
L Overall length	ft in	24'6"	24'11"	24'9"	25'	25'7"	25'2"	25'4"	25'9"	25'6"
Turning circle radius over tyres	ft in	17'7"	17'7"	17'7"	17'9"	17'9"	17'9"	17'9"	17'9"	17'9"
Turning circle radius over outside bucket edge	ft in	19'6"	19'8"	19'7"	20'2"	20'	20'2"	20'3"	20'4"	20'3"
Breakout force (SAE)	lbf	24,730	22,480	23,605	28,100	28,855	26,980	31,475	29,225	30,350
Tipping load, straight*	lb	22,270	20,615	22,155	24,690	22,930	24,580	27,560	25,575	27,340
Tipping load, fully articulated*	lb	19,245	17,635	19,070	21,275	19,580	21,185	24,275	22,600	24,030
Operating weight*	lb	29,035	29,917	29,125	32,010	32,850	32,080	33,975	34,855	34,040
Tire size		20.5R25 L3			20.5R25 L3			20.5R25 L3		

* The figures shown include the above tires, all lubricants, a full fuel tank, the ROPS / FOPS cab and the operator. Different tires and optional equipment will change the operating weight and tipping load. (Tipping load, fully articulated according to ISO 14397-1)

** Actual bucket capacity may be approx. 10% larger than the calculation according to ISO 7546 standard. The degree to which the bucket can be filled depends on the material – see page 26.

¹ With the optional "comfort safety door (can be opened 180°)", the "H" value increases by 5" when door is open.


ZK = Z-bar linkage

ZK-QC = Z-bar linkage incl. quick coupler

T = Welded-on tooth holder with add-on teeth

Dimensions

High lift arm/standard bucket

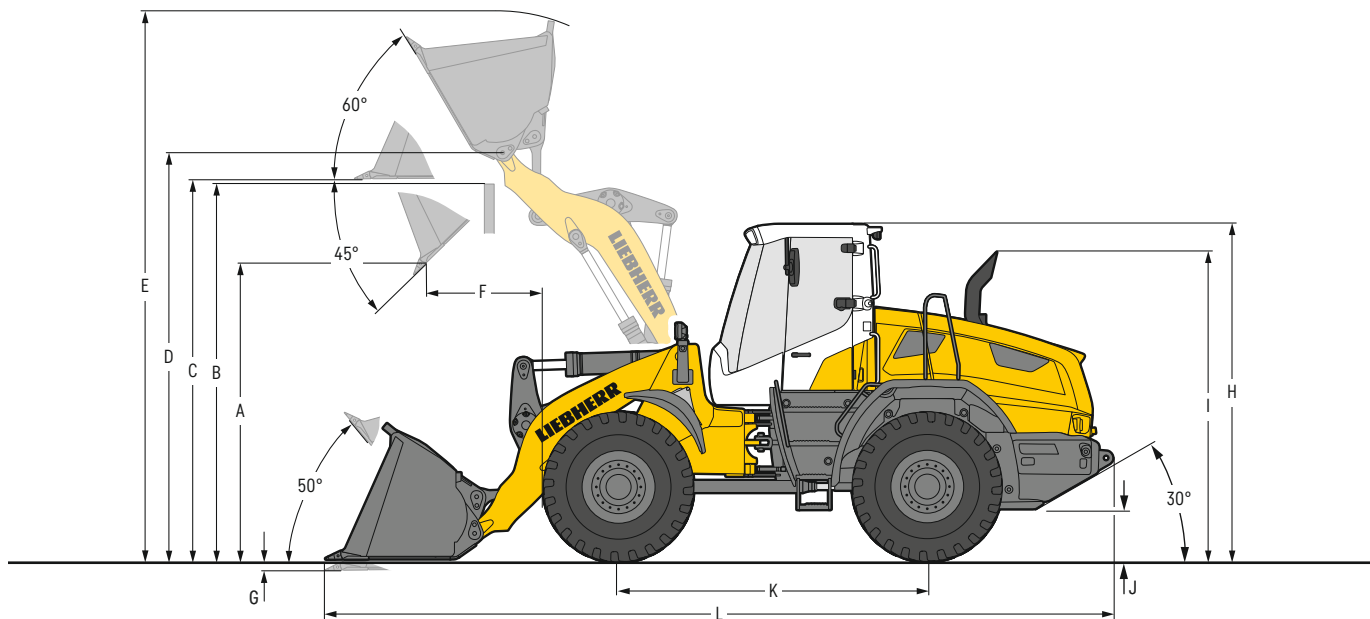

L 526 – L 546



Loading bucket

		L 526		L 538		L 546	
Geometry		ZK	ZK-QC	ZK	ZK-QC	ZK	ZK-QC
Cutting tools		T	T	T	T	T	T
Lift arm length	ft in	9'10"	9'10"	9'10"	9'10"	9'10"	9'10"
Bucket capacity according to ISO 7546**	yd³	2.6	2.6	3.1	2.9	3.7	3.4
Specific material density	lb/yd³	2,697	2,528	2,697	2,697	2,697	2,697
Bucket width	ft in	8'3"	8'3"	8'3"	8'3"	8'11"	8'11"
A Dumping height at max. lift height and 45° discharge	ft in	11'7"	11'2"	11'6"	11'2"	11'5"	11'1"
B Dump-over height	ft in	13'2"	13'2"	13'4"	13'4"	13'4"	13'4"
C Max. height of bucket bottom	ft in	13'9"	13'9"	13'12"	13'12"	13'12"	13'12"
D Max. height of bucket pivot point	ft in	14'8"	14'8"	14'10"	14'10"	14'10"	14'10"
E Max. operating height	ft in	18'5"	18'10"	19'1"	19'3"	19'2"	19'5"
F Reach at max. lift height and 45° discharge	ft in	2'9"	3'2"	3'1"	3'4"	3'2"	3'6"
G Digging depth	ft in	5"	5"	5"	5"	5"	5"
H Height above operator's cab ¹⁾	ft in	10'8"	10'8"	10'8"	10'8"	10'8"	10'8"
I Height above exhaust	ft in	9'8"	9'8"	9'8"	9'8"	9'8"	9'8"
J Ground clearance	ft in	1'5"	1'5"	1'5"	1'5"	1'5"	1'5"
K Wheelbase	ft in	9'9"	9'9"	9'11"	9'11"	9'11"	9'11"
L Overall length	ft in	26'2"	26'9"	26'6"	26'11"	26'8"	27'1"
Turning circle radius over tyres	ft in	17'7"	17'7"	17'9"	17'9"	17'9"	17'9"
Turning circle radius over outside bucket edge	ft in	20'4"	20'6"	20'6"	20'8"	20'10"	20'12"
Breakout force (SAE)	lbf	25,855	23,605	29,225	26,980	32,600	30,350
Tipping load, straight*	lb	17,415	15,875	20,505	19,005	22,950	21,385
Tipping load, fully articulated*	lb	14,905	13,450	17,615	16,205	20,283	18,830
Operating weight*	lb	29,610	30,580	32,340	33,225	34,350	35,275
Tire size		20.5R25 L3		20.5R25 L3		20.5R25 L3	

* The figures shown include the above tires, all lubricants, a full fuel tank, the ROPS / FOPS cab and the operator. Different tires and optional equipment will change the operating weight and tipping load. (Tipping load, fully articulated according to ISO 14397-1)

** Actual bucket capacity may be approx. 10% larger than the calculation according to ISO 7546 standard. The degree to which the bucket can be filled depends on the material – see page 26.

¹⁾ With the optional "comfort safety door (can be opened 180°)", the "H" value increases by 5" when door is open.

ZK = Z-bar linkage


ZK-QC = Z-bar linkage incl. quick coupler

T = Welded-on tooth holder with add-on teeth

Attachment

Light material bucket

L 526 – L 546

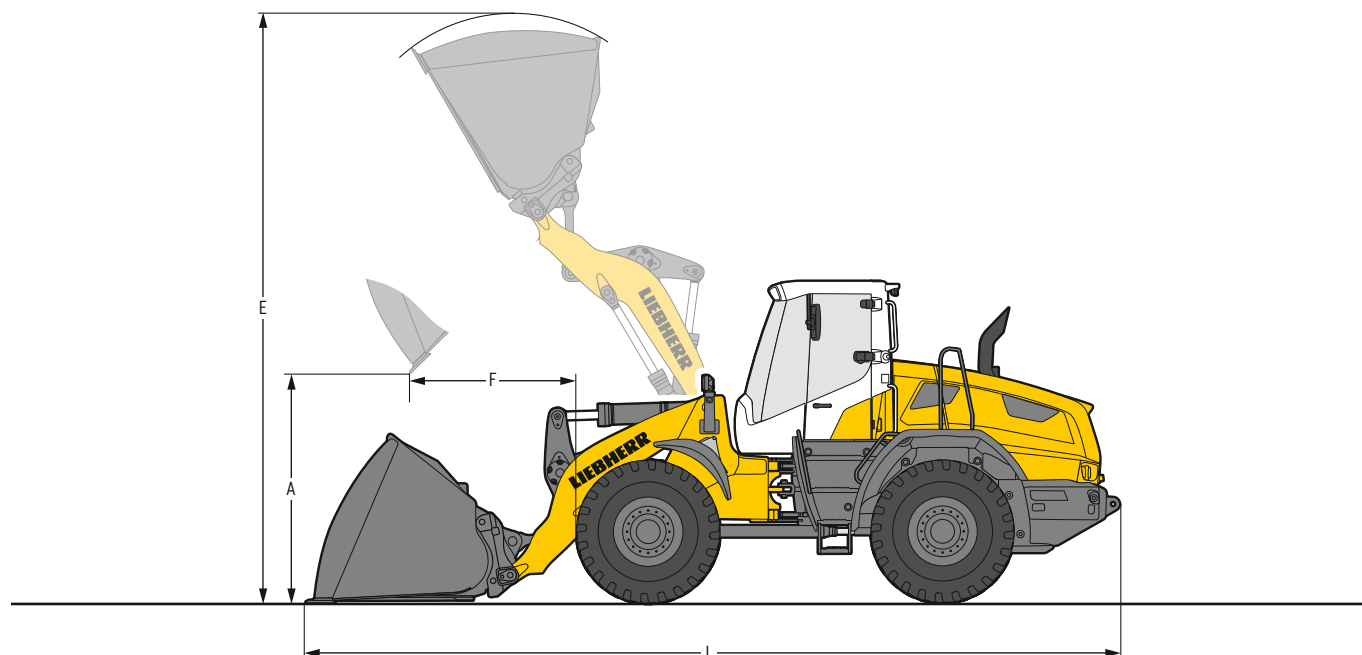

Heavy material density

		L 526		L 538		L 546	
Geometry		ZK	ZK-QC	ZK	ZK-QC	ZK	ZK-QC
Cutting tools		BOCE	BOCE	BOCE	BOCE	BOCE	BOCE
Bucket capacity	yd³	4.6	4.6	5.2	5.2	5.9	5.9
Specific material density	lb/yd³	1,770	1,686	1,770	1,686	1,770	1,686
Bucket width	ft in	8'10"	8'10"	8'10"	8'10"	8'10"	8'10"
A Dumping height at max. lift height	ft in	8'6"	8'2"	8'6"	8'3"	8'3"	8'
E Max. operating height	ft in	17'5"	17'9"	18'1"	18'5"	18'5"	18'10"
F Reach at maximum lift height	ft in	4'	4'4"	4'8"	4'11"	4'11"	5'2"
L Overall length	ft in	25'5"	25'11"	26'2"	26'6"	26'7"	26'10"
Tipping load, straight*	lb	21,165	19,620	23,370	22,045	26,060	24,690
Tipping load, fully articulated*	lb	18,145	16,735	20,040	18,785	22,355	21,075
Operating weight*	lb	29,650	30,620	32,605	33,555	34,615	35,540
Tire size		20.5R25 L3		20.5R25 L3		20.5R25 L3	



Light material density

		L 526	L 538	L 546
Geometry		ZK-QC	ZK-QC	ZK-QC
Cutting tools		BOCE	BOCE	BOCE
Bucket capacity	yd³	7.2	8.5	9.8
Specific material density	lb/yd³	843	843	843
Bucket width	ft in	8'10"	8'10"	9'10"
A Dumping height at max. lift height	ft in	7'3"	7'2"	7'1"
E Max. operating height	ft in	19'	19'11"	20'1"
F Reach at maximum lift height	ft in	5'3"	6'	6'1"
L Overall length	ft in	27'3"	28'1"	28'2"
Tipping load, straight*	lb	18,740	20,945	23,370
Tipping load, fully articulated*	lb	15,805	17,680	19,755
Operating weight*	lb	31,305	34,435	36,640
Tire size		20.5R25 L3		20.5R25 L3

* The figures shown include the above tires, all lubricants, a full fuel tank, the ROPS / FOPS cab and the operator. Different tires and optional equipment will change the operating weight and tipping load. (Tipping load, fully articulated according to ISO 14397-1)

For wheel loaders with large light material buckets and high-dump buckets or log grapples, we supply visual aids such as mirrors or cameras for front area monitoring that meet the requirements of the ISO 5006:2017 field of vision test.


ZK = Z-bar linkage

ZK-QC = Z-bar linkage incl. quick coupler

BOCE = Bolt-on cutting edge

Attachment

High lift arm/light material bucket

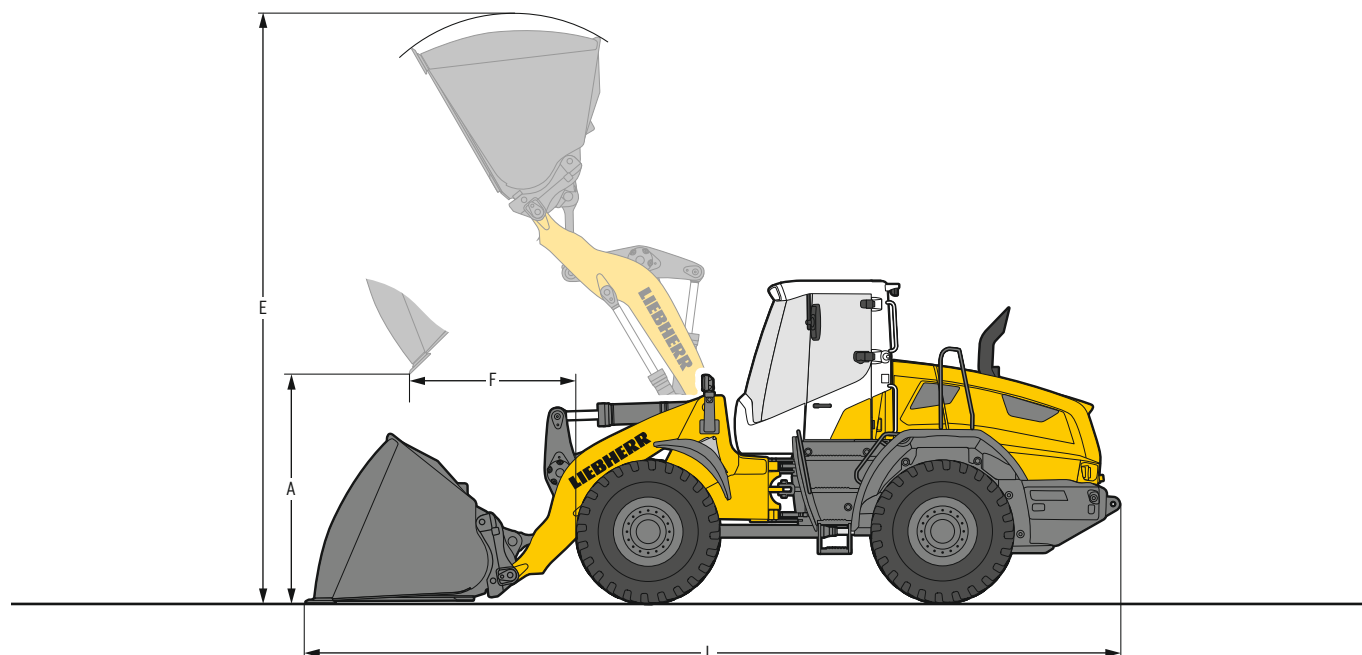

L 526 – L 546



Heavy material density

		L 526		L 538		L 546	
Geometry		ZK	ZK-QC	ZK	ZK-QC	ZK	ZK-QC
Cutting tools		BOCE	BOCE	BOCE	BOCE	BOCE	BOCE
Bucket capacity	yd ³	4.6	4.6	5.2	5.2	5.9	5.9
Specific material density	lb/yd ³	1,433	1,348	1,433	1,348	1,433	1,348
Bucket width	ft in	8'10"	8'10"	8'10"	8'10"	8'10"	8'10"
A Dumping height at max. lift height	ft in	10'5"	10'1"	10'3"	10'	10'	9'10"
E Max. operating height	ft in	19'3"	19'7"	19'11"	20'3"	20'3"	20'7"
F Reach at maximum lift height	ft in	3'10"	4'2"	4'2"	4'5"	4'6"	4'8"
L Overall length	ft in	27'3"	27'9"	27'7"	27'12"	28'	28'4"
Tipping load, straight*	lb	16,315	14,990	19,245	18,080	21,605	20,370
Tipping load, fully articulated*	lb	13,845	12,610	16,425	15,255	18,410	17,240
Operating weight*	lb	30,315	31,285	33,050	33,995	35,055	36,000
Tire size		20.5R25 L3		20.5R25 L3		20.5R25 L3	



Light material density

		L 526	L 538	L 546
Geometry		ZK-QC	ZK-QC	ZK-QC
Cutting tools		BOCE	BOCE	BOCE
Bucket capacity	yd ³	7.2	8.5	9.8
Specific material density	lb/yd ³	843	843	843
Bucket width	ft in	8'10"	8'10"	8'10"
A Dumping height at max. lift height	ft in	9'7"	9'4"	9'11"
E Max. operating height	ft in	20'4"	21'2"	21'9"
F Reach at maximum lift height	ft in	4'8"	5'1"	5'6"
L Overall length	ft in	28'5"	28'12"	29'6"
Tipping load, straight*	lb	14,575	17,420	19,620
Tipping load, fully articulated*	lb	12,215	14,575	16,425
Operating weight*	lb	31,635	34,500	36,710
Tire size		20.5R25 L3		20.5R25 L3

* The figures shown include the above tires, all lubricants, a full fuel tank, the ROPS/FOPS cab and the operator. Different tires and optional equipment will change the operating weight and tipping load. (Tipping load, fully articulated according to ISO 14397-1)

For wheel loaders with large light material buckets and high-dump buckets or log grapples, we supply visual aids such as mirrors or cameras for front area monitoring that meet the requirements of the ISO 5006:2017 field of vision test.

ZK = Z-bar linkage


ZK-QC = Z-bar linkage incl. quick coupler

BOCE = Bolt-on cutting edge

Attachment

High-Dump bucket

L 526 – L 546

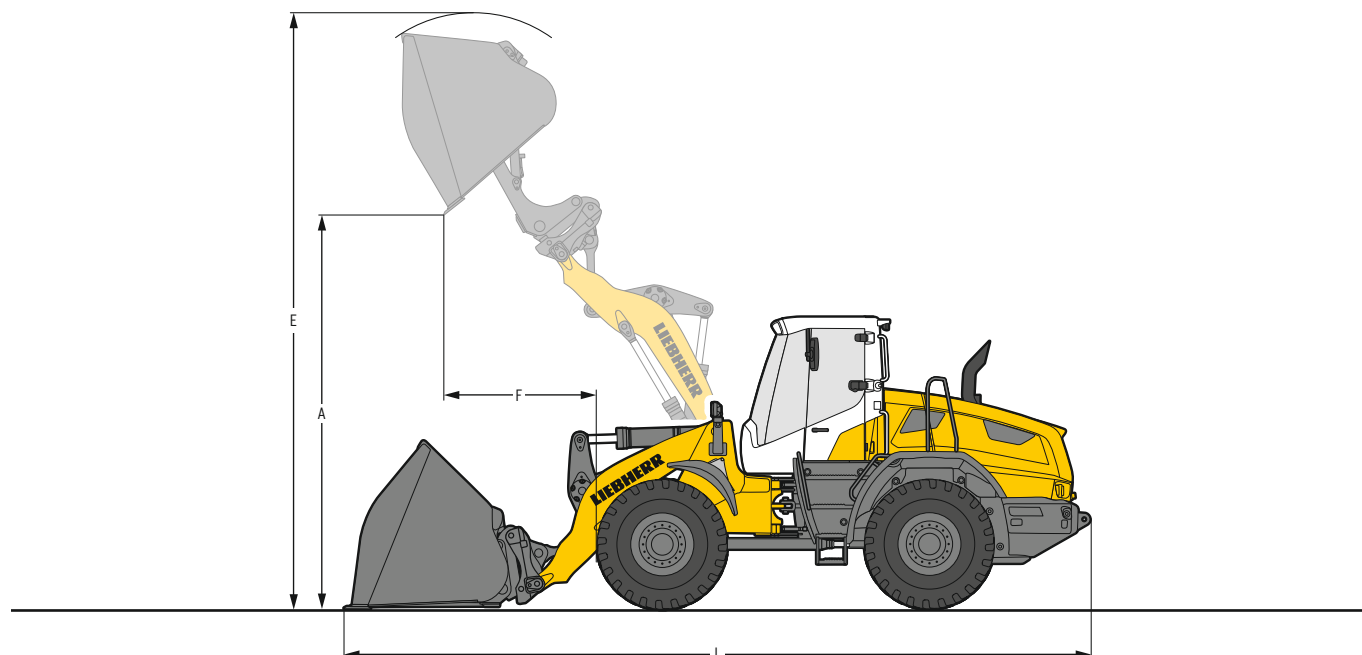

Heavy material density

		L 526		L 538		L 546	
Geometry		ZK	ZK-QC	ZK	ZK-QC	ZK	ZK-QC
Cutting tools		BOCE	BOCE	BOCE	BOCE	BOCE	BOCE
Bucket capacity	yd³	4.6	4.6	5.2	5.2	5.9	5.9
Specific material density	lb/yd³	1,854	1,770	1,854	1,770	1,854	1,770
Bucket width	ft in	8'10"	8'10"	8'10"	8'10"	8'10"	8'10"
A Dumping height at max. lift height	ft in	14'9"	15'1"	14'11"	15'4"	14'9"	15'1"
E Max. operating height	ft in	20'4"	20'10"	20'10"	21'6"	21'2"	21'8"
F Reach at maximum lift height	ft in	4'2"	4'5"	4'8"	4'10"	4'11"	5'1"
L Overall length	ft in	25'11"	26'4"	26'5"	26'8"	26'9"	27'1"
Tipping load, straight*	lb	19,180	17,860	21,605	20,505	24,470	23,150
Tipping load, fully articulated*	lb	16,205	15,060	18,387	17,330	20,700	19,510
Operating weight*	lb	31,110	31,880	34,040	34,790	36,045	36,817
Tire size		20.5R25 L3		20.5R25 L3		20.5R25 L3	



Light material density

		L 526	L 538	L 546
Geometry		ZK-QC	ZK-QC	ZK-QC
Cutting tools		BOCE	BOCE	BOCE
Bucket capacity	yd³	5.9	7.2	8.5
Specific material density	lb/yd³	843	843	843
Bucket width	ft in	8'10"	8'10"	9'10"
A Dumping height at max. lift height	ft in	14'4"	14'5"	14'4"
E Max. operating height	ft in	21'10"	22'8"	22'10"
F Reach at maximum lift height	ft in	5'1"	5'9"	5'10"
L Overall length	ft in	27'3"	27'11"	28'
Tipping load, straight*	lb	17,860	20,130	22,930
Tipping load, fully articulated*	lb	14,950	16,930	19,225
Operating weight*	lb	32,165	35,120	37,215
Tire size		20.5R25 L3		20.5R25 L3

* The figures shown include the above tires, all lubricants, a full fuel tank, the ROPS / FOPS cab and the operator. Different tires and optional equipment will change the operating weight and tipping load.
(Tipping load, fully articulated according to ISO 14397-1)

For wheel loaders with large light material buckets and high-dump buckets or log grapples, we supply visual aids such as mirrors or cameras for front area monitoring that meet the requirements of the ISO 5006:2017 field of vision test.


ZK = Z-bar linkage

ZK-QC = Z-bar linkage incl. quick coupler

BOCE = Bolt-on cutting edge

Attachment

High lift arm/high dump bucket

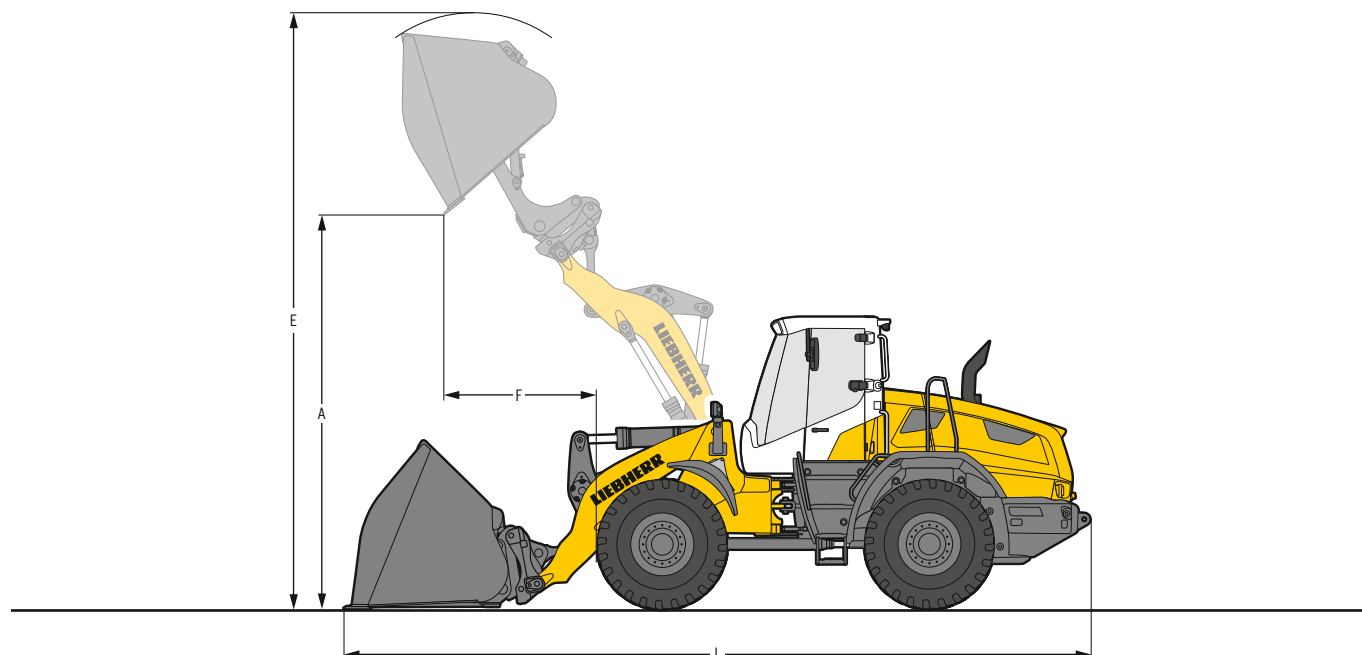

L 526 – L 546



Heavy material density

		L 526		L 538		L 546	
Geometry		ZK	ZK-QC	ZK	ZK-QC	ZK	ZK-QC
Cutting tools		BOCE	BOCE	BOCE	BOCE	BOCE	BOCE
Bucket capacity	yd³	4.6	4.6	5.2	5.2	5.9	5.9
Specific material density	lb/yd³	1,433	1,348	1,433	1,348	1,433	1,348
Bucket width	ft in	8'10"	8'10"	8'10"	8'10"	8'10"	8'10"
A Dumping height at max. lift height	ft in	16'8"	17'1"	16'8"	17'2"	16'6"	16'11"
E Max. operating height	ft in	22'4"	22'9"	22'8"	23'3"	22'11"	23'5"
F Reach at maximum lift height	ft in	4'	4'3"	4'3"	4'4"	4'6"	4'8"
L Overall length	ft in	27'9"	28'2"	27'10"	28'2"	28'2"	28'7"
Tipping load, straight*	lb	14,550	13,450	17,640	16,625	20,060	18,960
Tipping load, fully articulated*	lb	12,105	11,090	14,860	13,890	16,840	15,785
Operating weight*	lb	31,790	32,560	34,500	35,252	36,510	37,280
Tire size		20.5R25 L3		20.5R25 L3		20.5R25 L3	



Light material density

		L 526	L 538	L 546
Geometry		ZK-QC	ZK-QC	ZK-QC
Cutting tools		BOCE	BOCE	BOCE
Bucket capacity	yd³	5.2	6.5	7.9
Specific material density	lb/yd³	843	843	843
Bucket width	ft in	8'10"	8'10"	8'10"
A Dumping height at max. lift height	ft in	16'8"	16'5"	15'2"
E Max. operating height	ft in	23'2"	23'11"	24'5"
F Reach at maximum lift height	ft in	4'6"	4'11"	5'3"
L Overall length	ft in	28'5"	28'11"	29'4"
Tipping load, straight*	lb	13,670	16,535	18,850
Tipping load, fully articulated*	lb	11,245	13,715	15,720
Operating weight*	lb	32,520	35,385	37,410
Tire size		20.5R25 L3		20.5R25 L3

* The figures shown include the above tires, all lubricants, a full fuel tank, the ROPS/FOPS cab and the operator. Different tires and optional equipment will change the operating weight and tipping load.
(Tipping load, fully articulated according to ISO 14397-1)

For wheel loaders with large light material buckets and high-dump buckets or log grapples, we supply visual aids such as mirrors or cameras for front area monitoring that meet the requirements of the ISO 5006:2017 field of vision test.

ZK = Z-bar linkage


ZK-QC = Z-bar linkage incl. quick coupler

BOCE = Bolt-on cutting edge

Attachment

Fork carrier and fork

L 526 – L 546

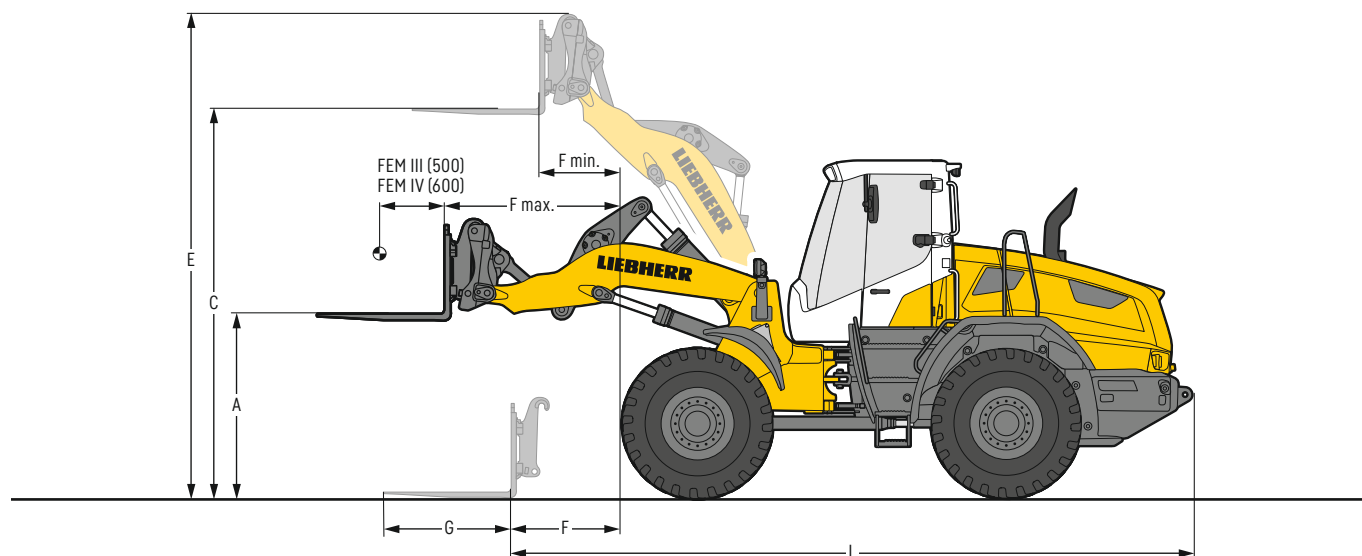

Fork carrier and fork

		L 526		L 538		L 546		L 538		L 546	
		STD	HL	STD	HL	STD	HL	STD	HL	STD	HL
Fork		FEM III	FEM III	FEM III	FEM III	FEM III	FEM III	FEM IV	FEM IV	FEM IV	FEM IV
Geometry		ZK-QC	ZK-QC	ZK-QC	ZK-QC	ZK-QC	ZK-QC	ZK-QC	ZK-QC	ZK-QC	ZK-QC
Lift arm length	ft in	8'4"	9'10"	8'8"	9'10"	8'8"	9'10"	8'8"	9'10"	8'8"	9'10"
A Lifting height at max. reach	ft in	5'7"	5'7"	5'10"	5'10"	5'10"	5'10"	5'9"	5'9"	5'9"	5'9"
C Max. lifting height	ft in	12'1"	13'11"	12'5"	14'2"	12'5"	14'2"	12'3"	14'	12'3"	14'
E Max. operating height	ft in	15'1"	17'	15'5"	17'3"	15'5"	17'3"	15'7"	17'4"	15'7"	17'4"
F Reach at loading position	ft in	3'5"	5'3"	3'6"	4'11"	3'6"	4'11"	3'7"	5'	3'7"	5'
F max. Max. reach	ft in	5'5"	6'10"	5'7"	6'9"	5'7"	6'9"	5'7"	6'8"	5'7"	6'8"
F min. Reach at max. lifting height	ft in	2'4"	2'2"	2'7"	2'2"	2'7"	2'2"	2'6"	2'1"	2'6"	2'1"
G Fork length	ft in	3'11"	3'11"	3'11"	3'11"	3'11"	3'11"	4'11"	4'11"	4'11"	4'11"
L Length - basic machine	ft in	21'7"	23'5"	21'11"	23'4"	21'11"	23'4"	21'12"	23'5"	21'12"	23'5"
Tipping load, straight*	lb	16,205	13,230	18,300	15,765	20,615	17,860	17,420	14,990	16,620	16,975
Tipping load, fully articulated*	lb	13,935	11,245	15,850	13,560	17,815	15,320	14,950	12,745	16,865	14,460
Recommended payload for uneven ground = 60 % of tipping load, articulated ¹⁾	lb	8,270	6,615	9,480	8,050	10,580	9,150	8,820	7,605	10,030	8,560
Recommended payload for smooth surfaces = 80 % of tipping load, articulated ¹⁾	lb	11,025 ²⁾	8,930	11,025 ²⁾	10,805	11,025 ²⁾	11,025 ²⁾	11,905	10,140	13,450	11,465
Operating weight*	lb	28,905	29,565	31,725	32,120	33,490	33,950	32,230	32,695	34,060	34,525
Tire size		20.5R25 L3		20.5R25 L3		20.5R25 L3		20.5R25 L3		20.5R25 L3	

* The figures shown include the above tires, all lubricants, a full fuel tank, the ROPS/FOPS cab and the operator. Different tires and optional equipment will change the operating weight and tipping load.
(Tipping load, fully articulated according to ISO 14397-1)

¹⁾ According to EN 474-3

²⁾ Payload is limited by FEM III fork carrier and forks to 11,025 lb


STD = Standard lift arm length

HL = High Lift

ZK-QC = Z-bar linkage incl. quick coupler

Attachment

Log grapple

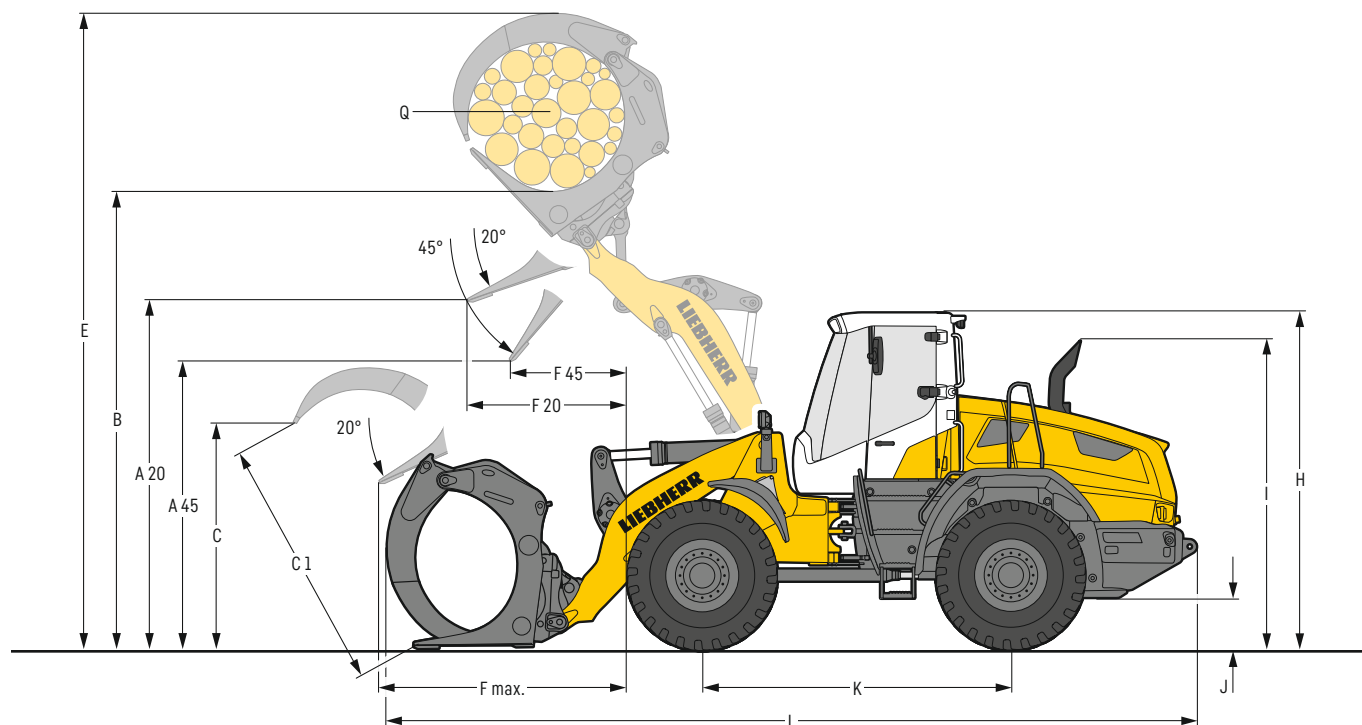

L 526 – L 546



Log grapple

		L 526	L 538	L 546
Geometry		ZK-QC	ZK-QC	ZK-QC
A20	Discharge height at 20°	ft in	10'6"	10'8"
A45	Discharge height at 45°	ft in	9'2"	9'2"
B	Manipulation height	ft in	14'1"	14'7"
C	Max. grapple opening in loading position	ft in	6'3"	7'10"
C1	Max. grapple opening	ft in	7'	8'6"
E	Max. height	ft in	19'2"	20'6"
F20	Reach at max. lifting height at 20° discharge	ft in	4'8"	5'5"
F45	Reach at max. lifting height at 45° discharge	ft in	3'5"	4'
F max.	Max. reach	ft in	7'9"	8'5"
H	Height above operator's cab ¹⁾	ft in	10'8"	10'8"
I	Height above exhaust	ft in	9'8"	9'8"
J	Ground clearance	ft in	1'5"	1'5"
K	Wheelbase	ft in	9'9"	9'11"
L	Overall length	ft in	25'4"	26'1"
Width over tires		ft in	8'2"	8'2"
Q	Grapple diameter	yd²	1.55	2.15
Grapple width		ft in	5'3"	5'3"
Payload*		lb	7,495	10,580
Operating weight*		lb	30,645	35,540
Tire size		20.5R25 L3	20.5R25 L3	20.5R25 L3

* The figures shown include the above tires, all lubricants, a full fuel tank, the ROPS / FOPS cab and the operator. Different tires and optional equipment will change the operating weight and tipping load. (Tipping load, fully articulated according to ISO 14397-1)

For wheel loaders with large light material buckets and high-dump buckets or log grapples, we supply visual aids such as mirrors or cameras for front area monitoring that meet the requirements of the ISO 5006:2017 field of vision test.

¹⁾ With the optional "comfort safety door (can be opened 180°)", the "H" value increases by 5" when door is open.

ZK-QC = Z-bar linkage incl. quick coupler

Bucket selection

L 526 – L 546

L 526

Lift arm	Bucket	Material density (lb/yd³)									
		674	1,011	1,348	1,686	2,023	2,360	2,697	3,034	3,371	
ZK	GPB 2.9 yd³							3.1		2.9	
	GPB 3.1 yd³						3.4		3.1		
	LMB 4.6 yd³				5.1		4.6				
	HDB 3.9 yd³				4.3		3.9				
ZK-QC	GPB 2.6 yd³							2.9		2.6	
	LMB 4.6 yd³				5.1		4.6				
	LMB 7.2 yd³	7.2									
	HDB 3.9 yd³				4.3		3.9				
	HDB 6.5 yd³	6.5									
ZK-HL	GPB 2.6 yd³							2.9		2.6	
	LMB 4.6 yd³				5.1		4.6				
	HDB 3.9 yd³				4.3		3.9				
ZK-QC-HL	GPB 2.6 yd³							2.2		2.0	
	LMB 4.6 yd³				3.9		3.5				
	LMB 5.9 yd³	5.9									
	HDB 3.9 yd³				4.3		3.9				
	HDB 5.2 yd³	5.2									


L 538

Lift arm	Bucket	Material density (lb/yd³)									
		674	1,011	1,348	1,686	2,023	2,360	2,697	3,034	3,371	
ZK	GPB	3.4 yd³						3.8		3.4	
	GPB	3.7 yd³					4.1		3.7		
	LMB	5.2 yd³			5.8		5.2				
	HDB	4.6 yd³			5.1		4.6				
ZK-QC	GPB	3.1 yd³						3.4		3.1	
	LMB	5.2 yd³			5.8		5.2				
		8.5 yd³	8.5								
	HDB	4.6 yd³			5.1		4.6				
		7.9 yd³	7.9								
ZK-HL	GPB	3.1 yd³						3.4		3.1	
	LMB	5.2 yd³			5.8		5.2				
	HDB	4.6 yd³			5.1		4.6				
ZK-QC-HL	GPB	2.9 yd³						3.1		2.9	
	LMB	5.2 yd³			5.8		5.2				
		7.2 yd³	7.2								
	HDB	4.6 yd³			5.1		4.6				
		6.5 yd³	6.5								

L 546

Lift arm	Bucket	Material density (lb/yd³)								
		674	1,011	1,348	1,686	2,023	2,360	2,697	3,034	3,371
ZK	GPB 3.9 yd³							4.3		3.9
	GPB 4.2 yd³						4.6		4.2	
	LMB 5.9 yd³				6.5		5.9			
	HDB 5.2 yd³				5.8		5.2			
ZK-QC	GPB 3.7 yd³							4.1		3.7
	LMB 5.9 yd³				6.5		5.9			
	9.8 yd³	9.8								
	HDB 5.2 yd³				5.8		5.2			
	9.2 yd³	9.2								
ZK-HL	GPB 3.7 yd³							4.1		3.7
	LMB 5.9 yd³				6.5		5.9			
	HDB 5.2 yd³				5.8		5.2			
ZK-QC-HL	GPB 3.4 yd³							3.8		3.4
	LMB 5.9 yd³				6.5		5.9			
	8.5 yd³	8.5								
	HDB 5.2 yd³				5.8		5.2			
	7.9 yd³	7.9								

Bucket filling factor



Lift arm

ZK	Z-bar linkage, standard lift arm length
ZK-QC	Z-bar linkage incl. quick coupler, standard lift arm length
ZK-HL	Z-bar linkage, High Lift
ZK-QC-HL	Z-bar linkage incl. quick coupler, High Lift

Bucket

GPB	General purpose bucket (Excavation bucket)
LMB	Light material bucket
HDB	High-dump bucket

For wheel loaders with large light material buckets and high-dump buckets or log grapples, we supply visual aids such as mirrors or cameras for front area monitoring that meet the requirements of the ISO 5006:2017 field of vision test.

Bulk material densities and bucket filling factors

		lb/yd ³	%
Gravel	moist	3,203	105
	dry	2,697	105
	crushed stone	2,528	100
Sand	dry	2,528	105
	wet	3,203	110
Gravel and Sand	dry	2,865	105
	wet	3,371	100
Sand / Clay		2,697	110
Clay	natural	2,697	110
	dry	2,360	110
Clay / Gravel	dry	2,360	110
	wet	2,697	100

		lb/yd ³	%
Earth	dry	2,191	115
	wet excavated	2,697	110
Topsoil		1,854	110
Basalt		3,287	100
Granite		3,034	95
Sandstone		2,697	100
Slate		2,950	100
Bauxite		2,360	100
Limestone		2,697	100
Gypsum	broken	3,034	100
Coke		843	110
Slag	broken	3,034	100

		lb/yd ³	%
Glass waste	broken	2,360	100
	solid	1,686	100
Compost	dry	1,348	105
	wet	1,686	110
Wood chips / Saw dust		843	110
Paper	shredded / loose	1,011	110
	recovered paper / cardboard	1,686	110
Coal	heavy material density	2,023	110
	light material density	1,517	110
Waste	domestic waste	843	100
	bulky waste	1,686	100

Tipping load



What is tipping load?

Load at centre of gravity of working equipment, so that the wheel loader just begins to tip over the front axle. This is the most unfavourable static-load position for the wheel loader. Lifting arms horizontal, wheel loader fully articulated at centre pivot.

Pay load.

The pay load must not exceed 50 % of the tipping load when articulated. This is equivalent to a static stability-margin factor of 2.0.

Bucket capacity.

The bucket volume is determined from the pay load.

$$\text{Pay load} = \frac{\text{Tipping load, articulated}}{2}$$

$$\text{Bucket capacity} = \frac{\text{Pay load (t)}}{\text{Specific bulk weight of material (t/m}^3\text{)}}$$

Tires



Tire types

	Size and tread code		Change of operating weight lb	Width over tires ft in	Change in vertical dimensions* ft in	Use
L 526						
Bridgestone	17.5R25 VJT	L3	- 394	2,440	- 44	Bulk material (firm ground conditions)
Bridgestone	17.5R25 VSDL	L5	119	2,450	- 5	Stone, Scrap, Recycling (firm ground conditions)
Bridgestone	20.5R25 VJT	L3	17	2,480	8	Bulk material (firm ground conditions)
Bridgestone	20.5R25 VSDL	L5	680	2,480	60	Stone, Scrap, Recycling (firm ground conditions)
Bridgestone	20.5R25 VSDR	L5	688	2,480	60	Stone, Scrap, Recycling (firm ground conditions)
Bridgestone	550/65R25 VTS	L3	- 132	2,500	- 50	Gravel (all ground conditions)
Bridgestone	650/65R25 VTS	L3	605	2,650	16	Gravel (all ground conditions)
Continental	20.5R25 EM-Master	L3	166	2,480	26	Bulk material (firm ground conditions)
Goodyear	17.5R25 TL-3A+	L3	- 252	2,460	- 39	Sand, Gravel, Earthworks, Clay (all ground conditions)
Goodyear	17.5R25 RL-5K	L5	160	2,460	- 20	Stone, Scrap, Recycling (firm ground conditions)
Goodyear	20.5R25 TL-3A+	L3	156	2,500	11	Sand, Gravel, Earthworks, Clay (all ground conditions)
Goodyear	20.5R25 GP-4D	L4	328	2,470	20	Gravel, Industry, Wood (firm ground conditions)
Goodyear	20.5R25 RL-5K	L5	752	2,500	49	Stone, Scrap, Recycling (firm ground conditions)
Michelin	17.5R25 XTLA	L2	- 555	2,460	- 44	Gravel, Earthworks, Clay (all ground conditions)
Michelin	17.5R25 XHA2	L3	- 528	2,460	- 61	Sand, Gravel (all ground conditions)
Michelin	17.5R25 XLD D2A	L5	- 232	2,460	- 25	Stone, Mining spoil (firm ground conditions)
Michelin	17.5R25 X MINE PRO	L5	32	2,490	- 17	Stone, Scrap, Recycling (firm ground conditions)
Michelin	20.5R25 XTLA	L2	- 121	2,480	- 7	Gravel, Earthworks, Clay (all ground conditions)
Michelin	20.5R25 XHA2	L3	0	2,480	0	Sand, Gravel (all ground conditions)
Michelin	20.5R25 XLD D2A	L5	431	2,480	30	Stone, Mining spoil (firm ground conditions)
Michelin	20.5R25 X MINE PRO	L5	616	2,510	48	Stone, Scrap, Recycling (firm ground conditions)
Michelin	550/65R25 XLD65	L3	- 82	2,500	- 44	Gravel (all ground conditions)
Michelin	650/65R25 XLD65	L3	488	2,640	- 7	Gravel (all ground conditions)
Nokian	17.5R25 Hakkapeliitta	L2	- 488	2,450	- 51	Winter tires, Gravel, Asphalt (all ground conditions)
Nokian	20.5R25 Hakkapeliitta	L2	- 104	2,490	6	Winter tires, Gravel, Asphalt (all ground conditions)
L 538 / L 546						
Bridgestone	20.5R25 VJT	L3	17	2,480	8	Bulk material (firm ground conditions)
Bridgestone	20.5R25 VSDL	L5	680	2,480	60	Stone, Scrap, Recycling (firm ground conditions)
Bridgestone	20.5R25 VSDR	L5	688	2,480	60	Stone, Scrap, Recycling (firm ground conditions)
Bridgestone	550/65R25 VTS	L3	- 44	2,500	- 50	Gravel (all ground conditions)
Bridgestone	650/65R25 VTS	L3	595	2,650	16	Gravel (all ground conditions)
Continental	20.5R25 EM-Master	L3	156	2,480	26	Bulk material (firm ground conditions)
Goodyear	20.5R25 TL-3A+	L3	156	2,500	11	Sand, Gravel, Earthworks, Clay (all ground conditions)
Goodyear	20.5R25 GP-4D	L4	328	2,470	20	Gravel, Industry, Wood (firm ground conditions)
Goodyear	20.5R25 RL-5K	L5	752	2,500	49	Stone, Scrap, Recycling (firm ground conditions)
Michelin	20.5R25 XTLA	L2	- 121	2,510	- 7	Gravel, Earthworks, Clay (all ground conditions)
Michelin	20.5R25 XHA2	L3	0	2,480	0	Sand, Gravel (all ground conditions)
Michelin	20.5R25 XLD D2A	L5	431	2,480	30	Stone, Mining spoil (firm ground conditions)
Michelin	20.5R25 X MINE PRO	L5	606	2,510	48	Stone, Scrap, Recycling (firm ground conditions)
Michelin	550/65R25 XLD65	L3	- 82	2,500	- 44	Gravel (all ground conditions)
Michelin	650/65R25 XLD65	L3	478	2,640	- 7	Gravel (all ground conditions)
Nokian	20.5R25 Hakkapeliitta	L2	- 114	2,490	6	Winter tires, Gravel, Asphalt (all ground conditions)

* The stated values are theoretical and may deviate in practice.

Before operating the vehicle with tire foam filling or tire protection chains, please discuss this with the Liebherr-Werk Biskhofshofen GmbH.

The Liebherr wheel loaders

Wheel loader

					
		L 526	L 538	L 546	L 550 XPower
Tipping load	lb	19,245	21,275	24,275	27,560
Bucket capacity	yd ³	2.9	3.4	3.9	4.5
Operating weight	lb	29,035	32,010	33,975	40,895
Engine output	kW / HP	116 / 156	129 / 173	138 / 185	163 / 219

Wheel loader

					
		L 556 XPower	L 566 XPower	L 580 XPower	L 586 XPower
Tipping load	lb	30,315	35,055	42,330	47,620
Bucket capacity	yd ³	4.8	5.5	6.8	7.8
Operating weight	lb	43,210	52,690	60,955	71,870
Engine output	kW / HP	183 / 245	203 / 272	233 / 312	263 / 353

02.22

Environmental protection can help you earn money!



Always in fuel saving mode with the Liebherr fuel-saving calculator

100% power output with up to 30% less fuel consumption – the Liebherr fuel saving calculator shows how much fuel can be saved compared to similar machines. The online application is available free of charge and provides a quick and simple overview of fuel savings per year in dollars. The calculation is based on average fuel consumption, operating hours per year and the current fuel price. The potential savings when operating a Liebherr wheel loader are impressive – see for yourself!

	Ø Gallons / hour*
L 526: 2.9 yd³	5.92
L 538: 3.4 yd³	6.53
L 546: 3.9 yd³	7.51
L 550: 4.5 yd³	9.59
L 556: 4.8 yd³	10.63
L 566: 5.5 yd³	12.79
L 580: 6.8 yd³	14.31
L 586: 7.8 yd³	17.56

* Wheel loader in operation with a customer-specific machine design.

Averages data from MyLiebherr Performance, calculated on 19/11/2024.

Equipment



Basic wheel loader

	L 526	L 538	L 546
Adjustable plastic mudguard	+	+	+
Air pre-cleaner TOP AIR	+	+	+
Automatic central lubrication system Liebherr	+	+	+
Automatic delayed engine stop (5 min.)	+	+	+
Automatic engine shutdown (after 5 minutes at idle speed < 1,000 rpm)	+	+	+
Auxiliary heater (Additional heating with engine preheating)	+	+	+
Combined inching-braking system	●	●	●
Complete drive shaft protection	+	+	+
Cooling water pre-heating 230 V	+	+	+
Crash protection, rear	+	+	+
Crash protection, rear with guard	+	+	+
Design exhaust tail pipe in stainless steel	+	+	+
Electr. equipment for sweeper (socket for sweeper)	+	+	+
Electronic tractive force regulation for difficult ground conditions	●	●	●
External jump starter equipment	+	+	+
Fire extinguisher 13 lb	+	+	+
Fluff trap for radiator	+	+	+
Fuel pre-filter	●	●	●
Fuel pre-filter with pre-heating	+	+	+
Guard for headlights	+	+	+
Integrated tire pressure monitoring system	+	+	+
Large-mesh radiator	+	+	+
Liebherr biodegradable hydraulic oil	+	+	+
Liebherr weighing system with "Truck Payload Assist" (cannot be certified as a regulated weights and measure device)	+	+	+
Mudguard in plastic design	●	●	●
Multi-disc limited slip differentials in both axles	●	●	●
Plastic diesel exhaust fluid tank	●	●	●
Plastic wheel case flare	+	+	+
Rear license panel light	+	+	+
Reversible fan drive	+	+	+
Ride control	+	+	+
SCR technology incl. diesel particle filter	●	●	●
Speed limitation 12.4 mph	+	+	+
Steel design adjustable wheel case flare	+	+	+
Steel fuel tank	+	+	+
Steel mudguard	+	+	+
Toolbox with toolkit	+	+	+
Tow hitch	●	●	●
Travel light (with additional headlights) on front section halogen	+	+	+
Travel light (with additional headlights) on front section LED	+	+	+
Travel light on front section - halogen	●	●	●
Travel light on front section - LED	+	+	+



Equipment

	L 526	L 538	L 546
1st and 2nd hydraulic additional function on the front incl. lines	+	+	+
1st hydraulic additional function on the front incl. lines	+	+	+
Adjustable tipping speed	●	●	●
Automatic lift arm position and lowering programmable	●	●	●
Automatic return high dump bucket	+	+	+
Bucket bearing seal (standard)	●	●	●
Bucket return-to-dig (automatic and programmable)	●	●	●
Bucket return-to-dig via button	+	+	+
Bucket tilt assistant	+	+	+
Continuous mode, additional function	+	+	+
Float position	●	●	●
Fork carrier and pallet forks	+	+	+
High-dump bucket	+	+	+
Hydraulic quick change device preparation Solidlink	+	+	+
Hydraulic quick hitch	+	+	+
Hydraulic quick hitch Solidlink	+	+	+
Lift arms 8'4"	●	-	-
Lift arms 8'8"	-	●	●
Lift arms 9'10"	+	+	+
Light material bucket	+	+	+
Log grapple	+	+	+
Pipe break protection (lift and tilt cylinders)	+	+	+
Pressure relief for hydraulic additional function	●	●	●
Stroke limit damping	+	+	+
Sweeper mode	+	+	+
Tilt cylinder protection	+	+	+
Visualisation of the equipment position	●	●	●
Working hydraulics lockout	●	●	●

Equipment



Operator's cab

	L 526	L 538	L 546
2-in-1 steering	+	+	+
Access assistance to facilitate cleaning windscreen	●	●	●
Adapter plate for additional fastening on the multi-function rail	●	●	●
Adaptive working lighting	+	+	+
Air conditioning system	+	+	+
Amber beacon swiveling LED	+	+	+
Automatic air conditioning system	+	+	+
Automatic driver identification	+	+	+
Beacon activation in reverse travel	+	+	+
Button-operated horn via right button	+	+	+
Cigarette lighter	●	●	●
Clothes hook	●	●	●
Comfort Grammer operator's seat with longitudinal absorption, seat heating and 2-point seatbelt	●	●	●
Comfort Grammer operator's seat with longitudinal absorption, seat heating and 3-point seatbelt	+	+	+
Comfort Grammer operator's seat with longitudinal absorption, seat heating and 4-point seatbelt	+	+	+
Comfort safety door (open through 180°)	+	+	+
Cool box	+	+	+
Electronical theft protection with code	+	+	+
Electronical theft protection with key	+	+	+
Emergency steering pump	●	●	●
Exterior mirror, electrical adjustable, with heating	+	+	+
Exterior mirrors, folding and heated	+	+	+
Fire extinguisher in cab 4lb	+	+	+
First aid kit	●	●	●
Floor mat	●	●	●
Folding exterior mirror	●	●	●
Head rest	+	+	+
Headlights activation (on the cab) for reverse travel	+	+	+
Headlights activation for reverse travel (on the cab)	+	+	+
Headlights front, double design, halogen	●	●	●
Headlights front, double design, LED	+	+	+
Headlights rear, double design, halogen	+	+	+
Headlights rear, double design, LED	+	+	+
Headlights rear, single design, halogen	+	+	+
Headlights rear, single design, LED	+	+	+
Headlights rear, triple design, LED	+	+	+
Hinged window (left)	+	+	+
Interior mirror left	●	●	●
Joystick steering	+	+	+
Joystick steering only	+	+	+
Liebherr Connect			
MyLiebherr Maintenance	+	+	+
MyLiebherr Performance	+	+	+
MyLiebherr Portal*	●	●	●
Liebherr control lever with buttons	●	●	●
Liebherr control lever with mini-joystick	+	+	+
Manual driver identification	+	+	+
Multifunctional rail, right	●	●	●



Operator's cab

	L 526	L 538	L 546
Operating hour meter (mechanic)	+	+	+
Operation with multi-lever control	+	+	+
Particle filter F7	●	●	●
Power socket 12V	●	●	●
Premium Grammer operator's seat with longitudinal and transverse absorption, seat climate control, and 2-point seatbelt	+	+	+
Premiumdisplay (Touchscreen), with height adjustment and tilting function	●	●	●
Preparation for dust filtrating device	+	+	+
Preparation for protective ventilation device	+	+	+
Preparation for radio installation	+	+	+
Radio "Comfort" (DAB+ / USB / AUX / BLUETOOTH / handsfree set)	+	+	+
Radio "Standard"	+	+	+
Radio unit installation (preparation)	+	+	+
Rear window heated electrically	●	●	●
Seat belt warning device (visual) – green warning flashlight on cab	+	+	+
Sliding window right	●	●	●
Slipcover for operator seat	+	+	+
Soundproof ROPS / FOPS cab	●	●	●
Speed limit & fixed speed	+	+	+
Steering column folding	●	●	●
Steering column height-adjustable	+	+	+
Sunblind front	+	+	+
Sunblind rear	+	+	+
USB charging port	+	+	+
V _{max} speed limit adjustable via button on control unit	●	●	●
Wide angle mirror	+	+	+
Windscreen guard	+	+	+
Windscreen wiper single-sweep function with button	+	+	+
Wipe and wash system	●	●	●



Safety

	L 526	L 538	L 546
Active personnel detection at the rear	+	+	+
Back-up alarm (acoustical)	+	+	+
Custom paintwork	+	+	+
Main battery switch (lockable)	+	+	+
Rear space monitoring with camera	●	●	●
Reversing alarm LED warning flashlight (visual) (adjustable to 0 – constant – reverse travel)	+	+	+
Roof camera for front area monitoring	+	+	+
Skyview 360°	+	+	+
Standard parking brake	●	●	●

● = Standard

+ = Option

-- = not available

* = activation required free of charge