

# SPECIFICATIONS

## HX260<sup>A</sup>L

Powered By Cummins Performance Series Engine



**Net Power**  
169kW (227hp)  
at 2,000rpm

**Standard Bucket**  
1.17 m<sup>3</sup> (1.53 yd<sup>3</sup>)

**Operating Weight**  
27,000 kg (59,520 lb) -  
27,910 kg (61,530 lb)

| ENGINE        |                                                                                                                        |
|---------------|------------------------------------------------------------------------------------------------------------------------|
| Maker / Model | Cummins B6.7                                                                                                           |
| Type          | 4 cylinder, watercooled, 4-cycle, turbocharged charge aircooled, direct injection, electronic controlled diesel engine |
| Gross power   | 173kW (232hp) at 2,000rpm                                                                                              |
| Net power     | 169kW (227hp) at 2,000rpm                                                                                              |
| Max. power    | 173kW (232hp) at 2,000rpm                                                                                              |
| Peak torque   | 949 N·m (700 lb·ft) at 1,500 rpm                                                                                       |
| Displacement  | 6.7 l (408 cu in)                                                                                                      |

| HYDRAULIC SYSTEM                           |                                                |
|--------------------------------------------|------------------------------------------------|
| MAIN PUMP                                  |                                                |
| Type                                       | Variable displacement tandem axis piston pumps |
| Max. flow                                  | 2 × 221 ℓ/min                                  |
| Sub-Pump for pilot circuit                 | Gear pump                                      |
| Cross-sensing and fuel saving pump system. |                                                |

|                                 |                                                                  |
|---------------------------------|------------------------------------------------------------------|
| HYDRAULIC MOTORS                |                                                                  |
| Travel                          | Two speed axial pistons motor with brake valve and parking brake |
| Swing                           | Axial piston motor with automatic brake                          |
| RELIEF VALVE SETTING            |                                                                  |
| Implement circuits              | 350 kgf/cm <sup>2</sup> (4,980 psi)                              |
| Travel                          | 350 kgf/cm <sup>2</sup> (4,980 psi)                              |
| Power boost (Boom, Arm, Bucket) | 380 kgf/cm <sup>2</sup> (5,400 psi)                              |
| Swing circuit                   | 300 kgf/cm <sup>2</sup> (4,270 psi)                              |
| Pilot circuit                   | 40 kgf/cm <sup>2</sup> (570 psi)                                 |
| Service valve                   | Installed                                                        |

|                                               |                                           |
|-----------------------------------------------|-------------------------------------------|
| HYDRAULIC CYLINDERS                           |                                           |
| Boom cylinder                                 | Ø135x1,395 mm                             |
| Arm cylinder                                  | Ø145x1,620 mm                             |
| Arm cylinder (2-piece boom)                   | Ø145x1,620 mm                             |
| Adjust cylinder (2-piece boom)                | Ø160x1,230 mm                             |
| Bucket cylinder                               | Ø130x1,185 mm                             |
| * Hyundai Bio Hydraulic Oil (HBHO) available. |                                           |
| DRIVES & BRAKES                               |                                           |
| Drive method                                  | Fully Hydrostatic Type                    |
| Drive motor                                   | Axial Piston Motor, In-Shoe Design        |
| Reduction system                              | Planetary Reduction Gear                  |
| Max. Drawbar pull                             | 22,190 kgf (48,930 lbf)                   |
| Max. Travel speed (High / Low)                | 5.6 km/hr (3.5 mph) / 3.3 km/hr (2.0 mph) |
| Gradeability                                  | 35°(70%)                                  |
| Parking brake                                 | Multi Wet Disc                            |

|                                                                                                                         |                                                                               |
|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| CONTROL                                                                                                                 |                                                                               |
| Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation. |                                                                               |
| Pilot control                                                                                                           | Two Joysticks with One Safety Lever (LH): Swing and Arm (RH): Boom and Bucket |
| Traveling and Steering                                                                                                  | Two Levers With Pedals                                                        |
| Engine throttle                                                                                                         | Electric, Dial Type                                                           |

### OPERATING WEIGHT (APPROXIMATE)

Operating weight, including 5.85m (19' 2") boom, 3.05m (10' 0") arm, SAE heaped 1.17 m<sup>3</sup> (1.53 yd<sup>3</sup>) bucket, lubricant, coolant, full fuel tank, full hydraulic tank, and all standard equipment.

### OPERATING WEIGHT

| Shoes          |               | Operating Weight |                 | Ground Pressure           |
|----------------|---------------|------------------|-----------------|---------------------------|
| Type           | Width mm (in) |                  | kg (lb)         | kgf/cm <sup>2</sup> (psi) |
| Triple grouser | 700 (28")     | HX260AL          | 27,310 (60,210) | 0.48 (6.77)               |
|                | 800 (32")     | HX260AL          | 27,600 (60,850) | 0.42 (5.99)               |
|                | 900 (36")     | HX260AL          | 27,910 (61,530) | 0.38 (5.39)               |

### SWING SYSTEM

|                           |                                       |
|---------------------------|---------------------------------------|
| Swing motor               | Fixed Displacement Axial Piston Motor |
| Swing reduction           | Planetary Gear Reduction              |
| Swing bearing lubrication | Grease-Bathed                         |
| Swing brake               | Multi Wet Disc                        |
| Swing speed               | 11.2 rpm                              |

### COOLANT & LUBRICANT CAPACITY

|                                   | LITER | US gal |
|-----------------------------------|-------|--------|
| Fuel tank                         | 450   | 118.9  |
| Engine coolant                    | 40    | 10.6   |
| Engine oil                        | 23.1  | 6.1    |
| Swing device                      | 7     | 1.8    |
| Final drive (Each)                | 6     | 1.6    |
| Hydraulic system (Including tank) | 275   | 72.6   |
| Hydraulic tank                    | 160   | 42.3   |
| DEF/AdBlue®                       | 48    | 12.6   |

### UNDERCARRIAGE

The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets and a track chain with double or triple grouser shoes.

|                                    |                     |
|------------------------------------|---------------------|
| Center frame                       | X-Leg Type          |
| Track frame                        | Pentagonal Box Type |
| No. of Shoes on each side          | 51 EA               |
| No. of Carrier roller on each side | 2 EA                |
| No. of Track roller on each side   | 9 EA                |
| No. of Rail guard on each side     | 2 EA                |

### CAB NOISE LEVEL

Guaranteed noise level presented below can be differed depending on a range of factors such as operating condition, speed of a cooling fan, types of engine and so forth. Hearing protection may be necessary if an operator is working in the improperly maintained cabin or exposed to a noisy environment by leaving doors and/or windows open. With cooling fan speed at maximum value:

|                                               |          |
|-----------------------------------------------|----------|
| Operator sound pressure level (ISO 6396:2008) | 70 dB(A) |
| Exterior sound power level (ISO 6395:2008)    | 98 dB(A) |

\* Distance of 15 m (49.2 ft), moving forward in second gear ratio

# SPECIFICATIONS HX260A L


Powered By Cummins Performance Series Engine

## HX260AL DIMENSIONS

Unit: mm (ft.-in)

5.85 m (19' 2") BOOM and 3.05 m (10' 0"), 2.1 m (6' 11"), 2.5 m (8' 2"), 3.6 m (11' 10")

|    |                                   |                |
|----|-----------------------------------|----------------|
| A  | Tumbler Distance                  | 3,830 (12' 7") |
| B  | Overall Length of Crawler         | 4,640 (15' 3") |
| C  | Ground Clearance of Counterweight | 1,110 (3' 8")  |
| D  | Tail Swing Radius                 | 3,085 (10' 1") |
| D' | Rear-End Length                   | 2,990 (9' 10") |
| E  | Overall Width of Upperstructure   | 2,840 (9' 4")  |
| F  | Overall Height of Cab             | 3,050 (10' 0") |
| G  | Min. Ground Clearance             | 480 (1' 7")    |
| H  | Track Gauge                       | 2,580 (8' 6")  |
| I  | Overall Height of Guardrail       | 3,260 (10' 8") |

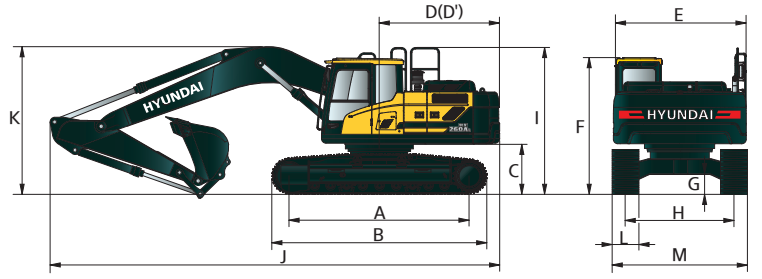


|                                |                  |                 |                 |                  |
|--------------------------------|------------------|-----------------|-----------------|------------------|
| Boom length                    | 5.85 (19' 2")    |                 |                 |                  |
| Arm length                     | 3.05 (10' 0")    | 2.1 (6' 11")    | 2.5 (8' 2")     | 3.6 (11' 10")    |
| J Overall length               | 10,040 (32' 11") | 10,170 (33' 4") | 10,120 (33' 2") | 10,030 (32' 11") |
| K Overall height of boom       | 3,220 (10' 7")   | 3,530 (11' 7")  | 3,590 (11' 9")  | 3,590 (11' 9")   |
| L Track shoe width             | 600 (1' 12")     | 700 (2' 4")     | 800 (2' 7")     | 900 (2' 11")     |
| M Overall Width (w/Foot Board) | 3,180 (10' 5")   | 3,280 (10' 9")  | 3,380 (11' 1")  | 3,480 (11' 5")   |

## HX260AL WORKING RANGE

Unit : mm (ft.-in)

|                                    |                 |                 |                  |                 |
|------------------------------------|-----------------|-----------------|------------------|-----------------|
| Boom length                        | 5.85 (19' 2")   |                 |                  |                 |
| Arm length                         | 3.05 (10' 0")   | 2.10 (6' 11")   | 2.50 (8' 2")     | 3.60 (11' 10")  |
| A Max. digging reach               | 10,360 (34' 0") | 9,560 (31' 4")  | 9,870 (32' 5")   | 10,870 (35' 8") |
| A' Max. digging reach on ground    | 10,190 (33' 5") | 9,370 (30' 9")  | 9,690 (31' 9")   | 10,710 (35' 2") |
| B Max. digging depth               | 7,010 (23' 0")  | 6,060 (19' 11") | 6,460 (21' 2")   | 7,560 (24' 10") |
| B' Max. digging depth (8' level)   | 6,850 (22' 6")  | 5,850 (19' 2")  | 6,280 (20' 7")   | 7,420 (24' 4")  |
| C Max. vertical wall digging depth | 6,170 (20' 3")  | 5,520 (18' 1")  | 5,680 (18' 8")   | 6,860 (22' 6")  |
| D Max. digging height              | 10,290 (33' 9") | 9,950 (32' 8")  | 10,020 (32' 10") | 10,560 (32' 7") |
| E Max. dumping height              | 7,150 (23' 5")  | 6,800 (22' 4")  | 6,900 (22' 8")   | 7,430 (22' 6")  |
| F Min. swing radius                | 3,450 (11' 4")  | 3,840 (12' 7")  | 3,190 (10' 6")   | 3,150 (10' 4")  |

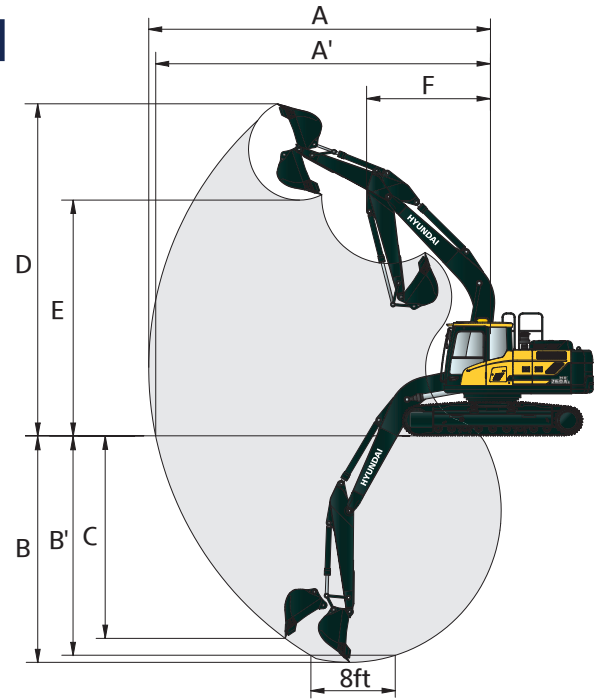

## HX260AL DIGGING FORCE


| Boom                 | Length | mm (ft.in) | 5,850 (19' 2")  |                 |                 |                 | [ ]:<br>Power Boost |
|----------------------|--------|------------|-----------------|-----------------|-----------------|-----------------|---------------------|
|                      | Weight | kg (lb)    | 2,460 (5,420)   |                 |                 |                 |                     |
| Arm                  | Length | mm (ft.in) | 2,100 (6' 11")  | 2,500 (8' 2")   | 3,050 (10' 0")  | 3,600 (11' 10") |                     |
|                      | Weight | kg (lb)    | 1,420 (3,130)   | 1,450 (3,200)   | 1,540 (3,400)   | 1,600 (3,530)   |                     |
| Bucket Digging Force | SAE    | kN         | 153.1 [166.1]   | 153.6 [167.2]   | 154.0 [167.2]   | 154.1 [167.2]   |                     |
|                      |        | kgf        | 15,600 [16,940] | 15,700 [17,050] | 15,700 [17,050] | 15,700 [17,050] |                     |
|                      |        | lbf        | 34,403 [37,350] | 34,522 [37,590] | 34,603 [37,590] | 34,638 [37,590] |                     |
|                      | ISO    | kN         | 177.2 [192.7]   | 177.8 [192.7]   | 178.2 [193.8]   | 178.4 [193.8]   |                     |
|                      |        | kgf        | 18,100 [19,650] | 18,100 [19,650] | 18,200 [19,760] | 18,200 [19,760] |                     |
|                      |        | lbf        | 39,819 [43,320] | 39,957 [43,320] | 40,051 [43,560] | 40,092 [43,560] |                     |
| Arm Crowd Force      | SAE    | kN         | 159.2 [172.5]   | 134.3 [145.8]   | 113.3 [122.5]   | 103.1 [111.8]   |                     |
|                      |        | kgf        | 16,200 [17,590] | 13,700 [14,870] | 11,500 [12,490] | 10,500 [11,400] |                     |
|                      |        | lbf        | 35,777 [38,780] | 30,188 [32,780] | 25,461 [27,540] | 23,170 [25,130] |                     |
|                      | ISO    | kN         | 167.7 [182.1]   | 140.8 [153.3]   | 118.2 [127.8]   | 107.0 [116.0]   |                     |
|                      |        | kgf        | 17,100 [18,570] | 14,400 [15,630] | 12,000 [13,030] | 10,900 [11,830] |                     |
|                      |        | lbf        | 37,698 [40,940] | 31,651 [34,460] | 26,553 [28,730] | 24,056 [26,080] |                     |

Note : Boom weight includes arm cylinder, piping, and pin  
Arm weight includes bucket cylinder, linkage, and pin

# SPECIFICATIONS

# HX260A L

Powered By Cummins Performance Series Engine

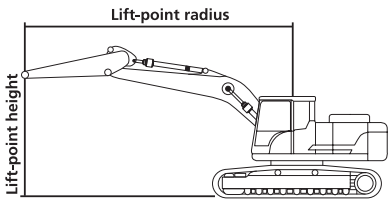

## Lifting Capacity

Boom: 5.85 m (19' 2")  
Arm: 3.05 m (10')  
Shoe 800 mm (32") triple grouser  
CWT 4,600 kg (10,141 lb)

Capacities based on North American Standard Configuration  
in accordance with ISO condition 2 standard.

Rating over front   
Rating over side or 360 degrees

| Lift-point height<br>m (ft) |    | Lift-point radius                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     | At max. reach                                                                       |                                                                                     |        |
|-----------------------------|----|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|
|                             |    | 1.5 m (4.9 ft)                                                                    |                                                                                   | 3.0 m (9.8 ft)                                                                    |                                                                                   | 4.5 m (14.8 ft)                                                                   |                                                                                   | 6.0 m (19.7 ft)                                                                   |                                                                                     | 7.5 m (24.6 ft)                                                                     |                                                                                     | Capacity                                                                            |                                                                                     | Reach  |
|                             |    |  |  |  |  |  |  |  |  |  |  |  |  | m (ft) |
| 7.5 m                       | kg |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   | *5,640                                                                            | *5,640                                                                              |                                                                                     |                                                                                     | *4,010                                                                              | *4,010                                                                              | 6.66   |
| 24.6 ft                     | lb |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   | *12,430                                                                           | *12,430                                                                             |                                                                                     |                                                                                     | *8,840                                                                              | *8,840                                                                              | (21.8) |
| 6.0 m                       | kg |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   | *5,760                                                                            | *5,760                                                                              | *4,710                                                                              | *4,710                                                                              | *3,770                                                                              | *3,770                                                                              | 7.70   |
| 19.7 ft                     | lb |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   | *12,700                                                                           | *12,700                                                                             | *10,380                                                                             | *10,380                                                                             | *8,310                                                                              | *8,310                                                                              | (25.3) |
| 4.5 m                       | kg |                                                                                   |                                                                                   |                                                                                   |                                                                                   | *7,530                                                                            | *7,530                                                                            | *6,560                                                                            | *6,560                                                                              | *6,130                                                                              | 4,780                                                                               | *3,730                                                                              | *3,730                                                                              | 8.34   |
| 14.8 ft                     | lb |                                                                                   |                                                                                   |                                                                                   |                                                                                   | *16,600                                                                           | *16,600                                                                           | *14,460                                                                           | *14,460                                                                             | *13,510                                                                             | 10,540                                                                              | *8,220                                                                              | *8,220                                                                              | (27.4) |
| 3.0 m                       | kg |                                                                                   |                                                                                   |                                                                                   |                                                                                   | *10,040                                                                           | 10,020                                                                            | 7,740                                                                             | 6,490                                                                               | *6,690                                                                              | 4,610                                                                               | *3,830                                                                              | 3,640                                                                               | 8.67   |
| 9.8 ft                      | lb |                                                                                   |                                                                                   |                                                                                   |                                                                                   | *22,130                                                                           | 22,090                                                                            | 17,060                                                                            | 14,310                                                                              | *14,750                                                                             | 10,160                                                                              | *8,440                                                                              | 8,020                                                                               | (28.5) |
| 1.5 m                       | kg |                                                                                   |                                                                                   |                                                                                   |                                                                                   | *12,350                                                                           | 9,290                                                                             | 8,940                                                                             | 6,140                                                                               | 6,790                                                                               | 4,430                                                                               | *4,100                                                                              | 3,510                                                                               | 8.74   |
| 4.9 ft                      | lb |                                                                                   |                                                                                   |                                                                                   |                                                                                   | *27,230                                                                           | 20,480                                                                            | 19,710                                                                            | 13,540                                                                              | 14,970                                                                              | 9,770                                                                               | *9,040                                                                              | 7,740                                                                               | (28.7) |
| Ground Line                 | kg |                                                                                   |                                                                                   | *6,350                                                                            | *6,350                                                                            | *13,640                                                                           | 8,910                                                                             | 9,310                                                                             | 5,890                                                                               | 6,640                                                                               | 4,300                                                                               | *4,570                                                                              | 3,580                                                                               | 8.53   |
|                             | lb |                                                                                   |                                                                                   | *14,000                                                                           | *14,000                                                                           | *30,070                                                                           | 19,640                                                                            | 12,530                                                                            | 12,990                                                                              | 14,640                                                                              | 9,480                                                                               | *10,080                                                                             | 7,890                                                                               | (28.0) |
| -1.5 m                      | kg | *7,170                                                                            | *7,170                                                                            | *11,190                                                                           | *11,190                                                                           | *13,910                                                                           | 8,790                                                                             | 9,180                                                                             | 5,780                                                                               | 6,580                                                                               | 4,240                                                                               | *5,400                                                                              | 3,860                                                                               | 8.04   |
| -4.9 ft                     | lb | *15,810                                                                           | *15,810                                                                           | *24,670                                                                           | *24,670                                                                           | *30,670                                                                           | 19,380                                                                            | 20,240                                                                            | 12,740                                                                              | 14,510                                                                              | 9,350                                                                               | *11,900                                                                             | 8,510                                                                               | (26.4) |
| -3.0 m                      | kg | *12,120                                                                           | *12,120                                                                           | *17,600                                                                           | *17,600                                                                           | *13,260                                                                           | 8,860                                                                             | 9,220                                                                             | 5,810                                                                               |                                                                                     |                                                                                     | 7,040                                                                               | 4,540                                                                               | 7.21   |
| -9.8 ft                     | lb | *26,720                                                                           | *26,720                                                                           | *38,800                                                                           | *38,800                                                                           | *29,230                                                                           | 19,530                                                                            | 20,330                                                                            | 12,810                                                                              |                                                                                     |                                                                                     | 15,520                                                                              | 10,010                                                                              | (23.7) |
| -4.5 m                      | kg |                                                                                   |                                                                                   | *15,990                                                                           | *15,990                                                                           | *11,320                                                                           | 9,130                                                                             |                                                                                   |                                                                                     |                                                                                     |                                                                                     | *8,170                                                                              | 6,210                                                                               | 5.88   |
| -14.8 ft                    | lb |                                                                                   |                                                                                   | *35,250                                                                           | *35,250                                                                           | *24,960                                                                           | 20,130                                                                            |                                                                                   |                                                                                     |                                                                                     |                                                                                     | *18,010                                                                             | 13,690                                                                              | (19.3) |

- NOTES: 1. Lifting capacities are based on ISO 10567.  
2. Lifting capacity of the HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.  
3. The Lift-point is the bucket pivot mounting pin on the arm (without bucket mass).  
4. (\*) indicates load limited by hydraulic capacity.



| ENGINE                                                      | STD | OPT |
|-------------------------------------------------------------|-----|-----|
| Cummins B6.7                                                | •   |     |
| <b>HYDRAULIC SYSTEM</b>                                     |     |     |
| <b>Electric Positive Flow Control (EPFC)</b>                |     |     |
| 3-Power Mode, 2-Work Mode, User Mode                        | •   |     |
| Variable Power Control                                      | •   |     |
| Pump Flow Control                                           | •   |     |
| Attachment Mode Flow Control                                | •   |     |
| Engine Auto Idle                                            | •   |     |
| Electronic Swing Parking Brake                              |     | •   |
| Engine Auto Shutdown Control                                | •   |     |
| Electronic Fan Control                                      | •   |     |
| Hyundai Bio Hydraulic oil (HBHO)                            |     | •   |
| <b>CAB &amp; INTERIOR</b>                                   |     |     |
| <b>ISO Standard cabin</b>                                   |     |     |
| Rise-Up Type Windshield Wiper                               | •   |     |
| Radio / USB Player                                          | •   |     |
| Handsfree Mobile Phone System with USB                      | •   |     |
| 12V Power Outlet (24V DC to 12V DC converter)               | •   |     |
| Electric Horn                                               | •   |     |
| All-Weather Steel Cab with 360° Visibility                  | •   |     |
| Safety Glass - Tempered Glass                               | •   |     |
| Safety Glass - Laminated Glass, Front Window & Glass        |     | •   |
| Sliding Fold-In Front Window                                | •   |     |
| Sliding Side Window (LH)                                    | •   |     |
| Lockable Door                                               | •   |     |
| Hot & Cool Box                                              | •   |     |
| Storage Compartment                                         | •   |     |
| Ashtray                                                     | •   |     |
| Transparent Cabin Roof-Cover                                | •   |     |
| Sun Visor                                                   | •   |     |
| Door And Cab Locks, One Key                                 | •   |     |
| Mechanical Suspension Seat With Heater                      | •   |     |
| Pilot-Operated Slidable Joystick                            | •   |     |
| Console Box Height Adjust System                            | •   |     |
| <b>Automatic climate control</b>                            |     |     |
| Air Conditioner & Heater                                    | •   |     |
| Defroster                                                   | •   |     |
| Starting Aid (Air Grid Heater) for Cold Weather             | •   |     |
| <b>Centralized monitoring</b>                               |     |     |
| 8" LCD Display                                              | •   |     |
| Engine Speed or Trip Meter / Accel.                         | •   |     |
| Engine Coolant Temperature Gauge                            | •   |     |
| Max Power                                                   | •   |     |
| Low Speed / High Speed                                      | •   |     |
| Auto Idle                                                   | •   |     |
| Overload                                                    | •   |     |
| Check Engine                                                | •   |     |
| Air Cleaner Clogging                                        | •   |     |
| Indicators                                                  | •   |     |
| ECO Gauges                                                  | •   |     |
| Fuel Level Gauge                                            | •   |     |
| Hyd. Oil Temperature Gauge                                  | •   |     |
| Warnings                                                    | •   |     |
| Communication Error                                         | •   |     |
| Low Battery                                                 | •   |     |
| Clock                                                       | •   |     |
| Cabin Lights                                                | •   |     |
| Cabin Front Window Rain Guard                               |     | •   |
| Cabin Roof-Steel Cover                                      |     | •   |
| <b>Seat</b>                                                 |     |     |
| Adjustable Air Suspension Seat With Heater                  | •   |     |
| <b>Cabin FOG (ISO 10262) Level 2</b>                        |     |     |
| FOG (Falling Object Protective Structure)-ISO 10262 Level 2 |     | •   |
| <b>Cabin ROPS</b>                                           |     |     |
| ROPS (Roll Over Protective Structures)-ISO 1211 7-2         | •   |     |

| SAFETY                                                               | STD | OPT |
|----------------------------------------------------------------------|-----|-----|
| Battery Master Switch                                                | •   |     |
| Rearview Camera                                                      | •   |     |
| AAVM (Advanced Around View Monitoring)                               |     | •   |
| Four Front Working Lights<br>(2 Boom Mounted, 2 Front Frame Mounted) | •   |     |
| Travel Alarm                                                         | •   |     |
| Rear Work Lamp                                                       |     | •   |
| Beacon Lamp                                                          |     | •   |
| Automatic Swing Brake                                                | •   |     |
| Boom Holding System                                                  | •   |     |
| Arm Holding System                                                   | •   |     |
| Safety Lock Valve For Boom Cylinder With Overload Warning Device     |     | •   |
| Safety Lock Valve For Arm Cylinder                                   |     | •   |
| Swing Lock System                                                    |     | •   |
| Three Outside Rearview Mirror                                        | •   |     |
| Front Guard - Wire Net                                               |     | •   |
| <b>ATTACHMENT</b>                                                    |     |     |
| <b>Booms</b>                                                         |     |     |
| 5.85 m, 19' 2"                                                       |     |     |
| <b>Arms</b>                                                          |     |     |
| 2.10 m, 6' 11"                                                       |     | •   |
| 2.50 m, 8' 2"                                                        |     | •   |
| 3.05 m, 10' 0"                                                       | •   |     |
| 3.60 m, 11' 10"                                                      |     | •   |
| <b>OTHER</b>                                                         |     |     |
| Removable Clean-Out Dust Net For Cooler                              | •   |     |
| Removable Reservoir Tank                                             | •   |     |
| Fuel Warmer                                                          |     | •   |
| Self-Diagnostics System                                              | •   |     |
| Hi MATE (Remote Management System)                                   | •   |     |
| Batteries (2 x 12 V x 100 AH)                                        | •   |     |
| Fuel Filler Pump (50 l/min)                                          |     | •   |
| Single-Acting Piping Kit (Breaker, Etc.)                             |     | •   |
| Double-Acting Piping Kit (Clamshell, Etc.)                           |     | •   |
| 2 way Proportional RCV & Pedal control selection                     | •   |     |
| Rotating Piping Kit                                                  |     | •   |
| Quick Coupler Piping                                                 | •   |     |
| Quick Coupler                                                        |     | •   |
| One Pedal Straight Travel System                                     | •   |     |
| Accumulator For Lowering Work Equipment                              | •   |     |
| Pattern Change Valve (2 Patterns)                                    | •   |     |
| Fine Swing Control System                                            |     | •   |
| Tool Kit                                                             |     | •   |
| <b>UNDERCARRIAGE</b>                                                 |     |     |
| Lower Frame Under Cover (Additional)                                 |     | •   |
| Lower Frame Under Cover (Normal)                                     | •   |     |
| Track Shoes                                                          |     | •   |
| Triple Grousers Shoe (700 mm, 2' 4" )                                |     | •   |
| Triple Grousers Shoe (800 mm, 2' 7" )                                | •   |     |
| Triple Grousers Shoe (900 mm, 2' 11" )                               |     | •   |
| Track Rail Guard                                                     | •   |     |

\* Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to international standards.

\* The photos may include attachments and optional equipment that are not available in your area.

\* Materials and specifications are subject to change without advance notice.

\* All imperial measurements rounded off to the nearest pound or inch.

**building a  
comfortable  
tomorrow**